


STAINLESS STEEL DIGITAL PORTION SCALE

PS11

Ideal for restaurants, cafeterias, delis, salad bars, and pizza parlors

- 6.9 in W x 6.5 in D / 18 cm W x 17 cm D stainless steel platform
- Internal rechargeable battery pack included
- Digital speed and accuracy
- Portable and compact (only takes up minimal counter space)
- 5 units of measure, including 5,000 g x 2 g and 11 lb x 0.1 oz

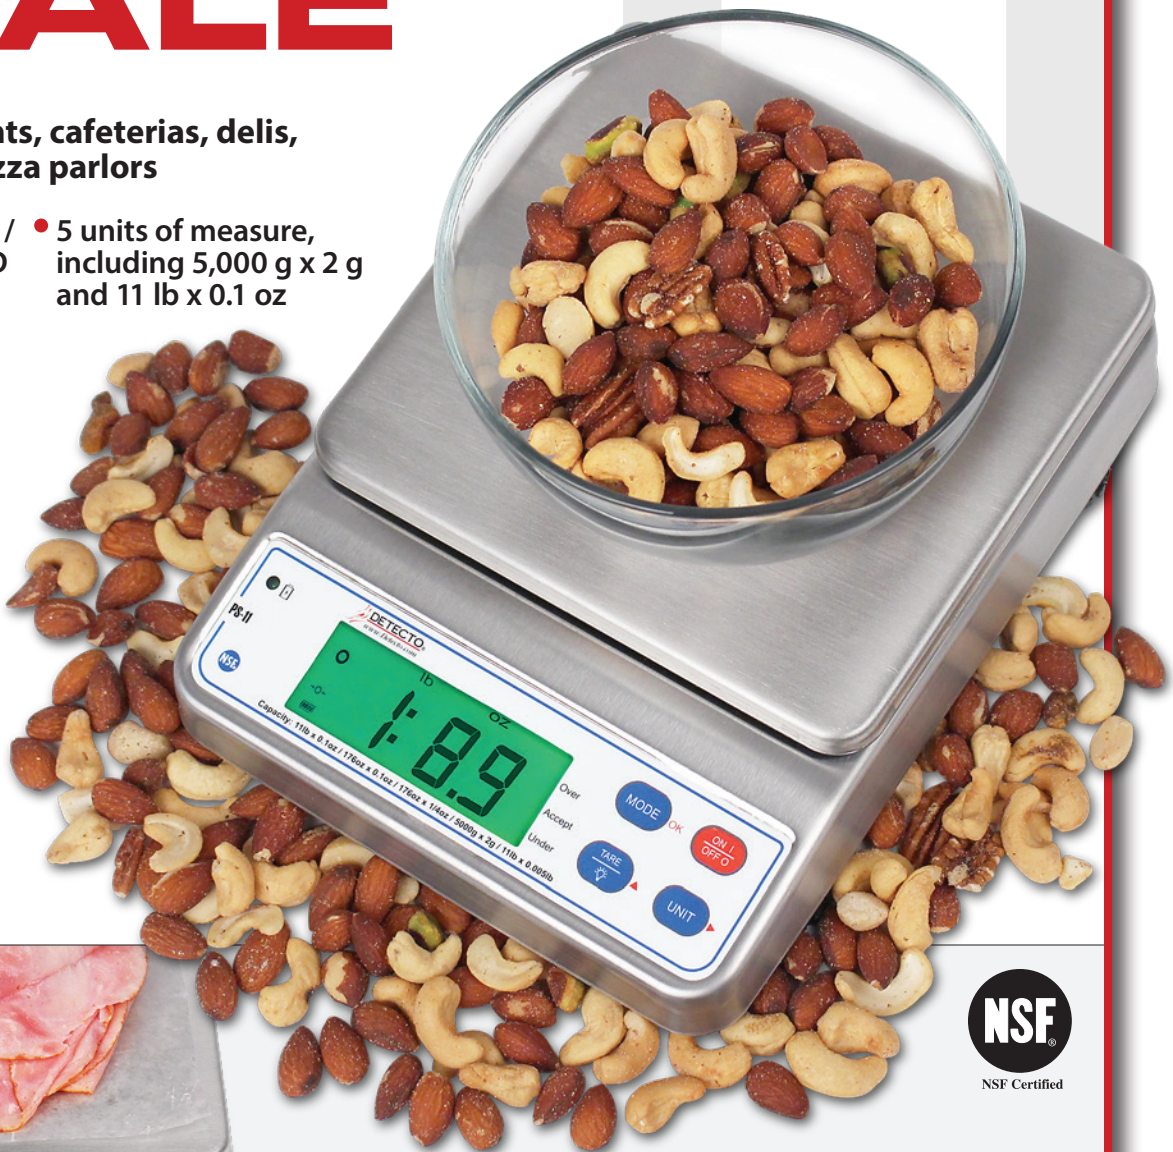

CHECKWEIGHING

LCD changes color based on Under/Accept/Over preset target weights that you select

DETECTO PS11



Bold, easy-to-read, 0.8-inch/20-mm high backlit LCD with checkweighing mode



Comes with UL/CSA-listed wall plug-in power supply and internal rechargeable battery pack

STAINLESS STEEL QUALITY AND DURABILITY

Stainless steel portion scale with stainless steel lift-off commodity tray

DETECTO's PS11 digital portion scale can be used wherever food is weighed, portioned, or dispensed. The PS11 offers five different units of measure and you can disable different units of measure if they are not needed. The display is angled upward for easy viewing. The display backlight will be turned on during weighing and will automatically turn off 5 seconds after the weight has been removed from the scale.

The scale's Tare feature lets you tare/zero the weight of a food container up to the full capacity of the scale. By using the checkweighing feature, you can select under and over weight limits for quickly checking food portion weights. The LCD will turn red for over weights, green for acceptable weights, and the backlit will turn off for under weights. Settings can be adjusted for gravity compensation. The PS11 comes in attractive retail packaging.

| MODEL | PS11 |
|--------------------|--|
| Capacity | 11 lb x 0.1 oz, 176 oz x 0.1 oz, 176 oz x 1/4 oz, 5000 g x 2 g, 11 lb x 0.005 lb |
| Overall Dimensions | 7.48 in W x 9.84 in D x 2.17 in H / 190 mm W x 250 mm D x 55 mm H |
| Platform Size | 6.9 in W x 6.5 in D / 175 mm W x 165 mm D |
| Construction | Stainless steel |
| Weight Display | 0.8 in / 20 mm high backlit LCD, 5 digits with fraction |
| Zero | Established on power up routine and maintained by auto-zero circuitry |
| Power | Built-in rechargeable battery pack (7.2VDC/1200mA) or 115 VAC 50/60Hz or 230 VAC 50/60 Hz powering a 15 VDC 300 mA wall plug-in UL/CSA listed power supply |
| Battery Life | 24 hours of continuous use with a fully charged battery pack |
| Tare (Zero) | 100% of scale capacity |
| Temperature | 40° to 105°F / 5° to 40°C |
| Humidity | 25% ~95% RH |
| Features | Low battery indicator, power saving selectable timing, auto shut-off |
| Keys | ON/OFF, MODE/OK, UNIT/▶, TARE/✱/▲ |
| Certification | NSF approved |
| Shipping Weight | 6 lb / 2.7 kg |
| UPC Code | 809161146103 |

- Auto Shutoff conserves battery life
- Simple, user-friendly, four-button operation
- NSF certified for food safety



DETECTO reserves the right to improve, enhance, or modify features and specifications without prior notice.



102 E. Daugherty, Webb City, MO 64870 USA
Ph: 417-673-4631 or 1-800-641-2008 Fax: 417-673-2153

SOLD BY: